

Coil Company News

HVAC COILS • SPACE COOLERS • AIR HANDLING EQUIPMENT

Issue 19

Steam Coils & Pressure Ratings

Standard Steam & Steam Distributing

*The differences **clearly explained** so you can understand how steam coils work and how to replace them.*

Coil Company's Quick Ship Program

Standard Ship

Almost all coils ship in 4-5 weeks as standard. There are some exceptions, based on special materials, but 95% of all coils will ship in 4-5 weeks with no premium.

10 Work Day Ship

Most coils can ship in 10 work days (2 weeks) for a premium of 20% based on the size of the job. We guarantee that the coil will ship on time or you don't pay the additional premium.

5 Work Day Ship

For major coil emergencies, you can have your coil ship in 5 work days (1 week). The required premium for this shipment is 40%. We guarantee shipment or you don't pay the premium.

This Issue

Steam Coils & Pressure Ratingspg. 1-2

Stock Hot Water Booster Coils.....pg. 2

This is the time of year when owners/contractors begin testing their heating systems to find out if everything still works. Because of the erosive nature of steam, it's not uncommon to have to regularly replace steam coils. This newsletter will be devoted to things that will help you understand how steam coils work and suggestions on how to effectively replace them.

There are 2 kinds of basic steam coils:

- 1 Standard Steam
- 2 Steam Distributing (Non-Freeze)

Standard Steam – 40°F and Above Air

This coil looks and operates very much like a hot water coil. It's almost always a 1 or 2 row coil, and the steam enters and leaves just like hot water. The major difference in the construction is that the tubes and return bends are heavier wall copper and the brazing process is upgraded. Always remember that even low pressure steam is more erosive than hot water and a steam coil needs to be built accordingly. Also, Standard Steam coils must be used with entering air above 40°F. If you pass colder air across this type of coil, you will freeze it immediately.

Steam Distributing – Below 40°F Air

The construction of a Steam Distributing Coil is entirely different than that of a Standard Steam. Everyplace that you see an outside tube or header, there is an inside tube and header that you can't see. All steam is distributed through these inside tubes and headers and slowly released to the outside tubes as the steam turns to condensate. The condensate then flows back down the outside tubes in the same direction that the entering steam comes from. The idea is that all the steam in the inside tubes keeps the condensate in the outside tubes from freezing when the air passes across the coil at less than 32°F.

An interesting note to this coil is that it was not designed to be non-freeze. The idea behind the coil was to keep an even flow of steam across the whole length of the coil, so that there were no uneven heating spots. On long coils it's very difficult to get steam to the far end of the coil, hence the name "Steam Distributing." Soon, however, manufacturers determined that these coils don't freeze easily and they became known as "non-freeze." This really is a slight misnomer, because under the exactly correct conditions, even non-freeze coils can freeze. If you don't believe this call up your contractor friends in Minnesota or Maine and ask them. They'll tell you that it's possible to freeze any coil. In most commercial applications, however, Steam Distributing coils are used successfully to handle all outside air preheat applications where the entering air is 40°F or below.

Steam vs. Hot Water

Steam is not hot water and even low pressure steam needs to be handled completely differently than hot water. When you build steam coils, you have several different options

continued on page 2

Coil Company, LLC.


3223 Phoenixville Pike, Malvern, PA 19355

Toll-Free: 800.523.7590 • Phone: 610.251.0257 • Fax: 610.251.0805

Email: sales@coilcompany.com • Web: www.coilcompany.com

Steam Coils & Pressure Ratings

continued from page 1

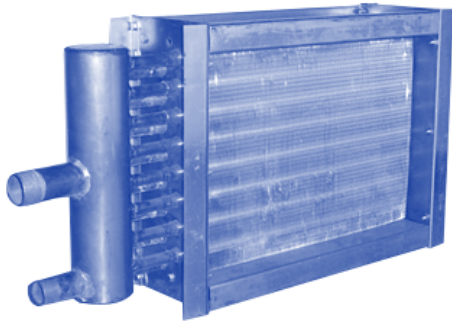

Steam Coil

regarding the construction. All of the below have brazing that includes a higher percentage of silver solder or even becomes welding joints rather than brazing. The point is that steam coils require a little more thought than the average coil. You cannot just interchangeably use a hot water coil for steam, because it will fail almost immediately.

- .025 wall copper - low pressure up to 20 p.s.i.g.
- .035 wall copper - medium pressure up to 50 p.s.i.g.
- .049 wall copper - high pressure up to 100 p.s.i.g.
- .035 or .049 cupro/nickle - higher pressure up to 200 p.s.i.g.
- .049 or .065 carbon steel - very high pressures
- .035 or .049 stainless steel - very high pressures

Traps, Vacuum Breakers, etc.

Steam requires a whole set of controls and valves that are not present with hot water. This is important, because both performance and life expectancy of steam coils is directly tied into how well these controls are designed. This is not true of any other type of coil. If you select the wrong type of trap or place it incorrectly in the system, then the coil will probably fail prematurely. Often you will also require vacuum breakers.

Tube Diameter

Steam distributing coils come in two different diameters, either 5/8" or 1". Standard steam coils are available only in 5/8". There are many 100% outside air preheat applications that require a large lbs./hr. of steam input. As a result, these applications develop a lot of condensate, and it's impossible to evacuate this amount of condensate from a small 5/8" tube. The coils just backup the steam, because the condensate has nowhere to go. When you have this kind of job, a 1" steam distributing coil is what you want to use.

Basically steam coils fail more often than other types of coils, because everything about them is more complicated. In the plan & spec market, everybody is trying to take "shortcuts" to get the job, and as a result, there are many misapplications. If ever you have any questions or need advice on steam coils, please call Coil Company. We've been building these coils for decades and we have a pretty good feel for what needs to be done.

Please let us know if we can help you with any of your coil selections or problems — call Coil Company at 800-523-7590.

Stock Hot Water Booster Coils



*Hot Water Booster Coils
sized from 6" x 12" to 30" x 60",
shipped from stock in 1-3 days.*

Replacement Hot Water Booster Coils, Shipped from Stock in 1 day to 3 days

It seems there's never a convenient time to install hot water duct coils. When it's time you know it, and you know you need to install them fast, with a quality coil specified for your application.

Coil Company consistently ships a broad range of hot water duct coils, and applying our combined experience of more than 75 years we'll make sure the coil suits the specifications of your application.

- 1 and 2 row coils in 33 different sizes from 6" X 12" to 30" X 60"
- Flanged or Slip & Drive

**For all your coil needs, technical information or questions, call our toll-free number
800-523-7590**



Coil Company, LLC.

3223 Phoenixville Pike, Malvern, PA 19355
Toll-Free: 800.523.7590 • Phone: 610.251.0257 • Fax: 610.251.0805
Email: sales@coilcompany.com • Web: www.coilcompany.com